


CONFIGURATION SHEET 1814A-1 **21T18A / 21R14A**

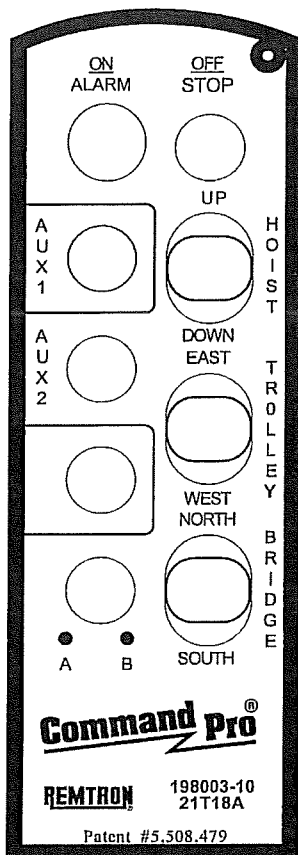

NOTES: ENG. # 198003

TX: 010013 MAP RX: R14A0001


1814A -1 STANDARD SYSTEM

TWO AUX OUTPUT-MOMENTARY

A/B/BOTH FOR T/H SELECTION

For Service or Repairs contact
Laird Technologies
1916 W. Mission Rd.
Escondido, CA 92029
Tel (800) 328-5570

NOTE:
24VAC, 12VDC, 24VDC USE .750A FUSE
115VAC, 230VAC USE .250A FUSE

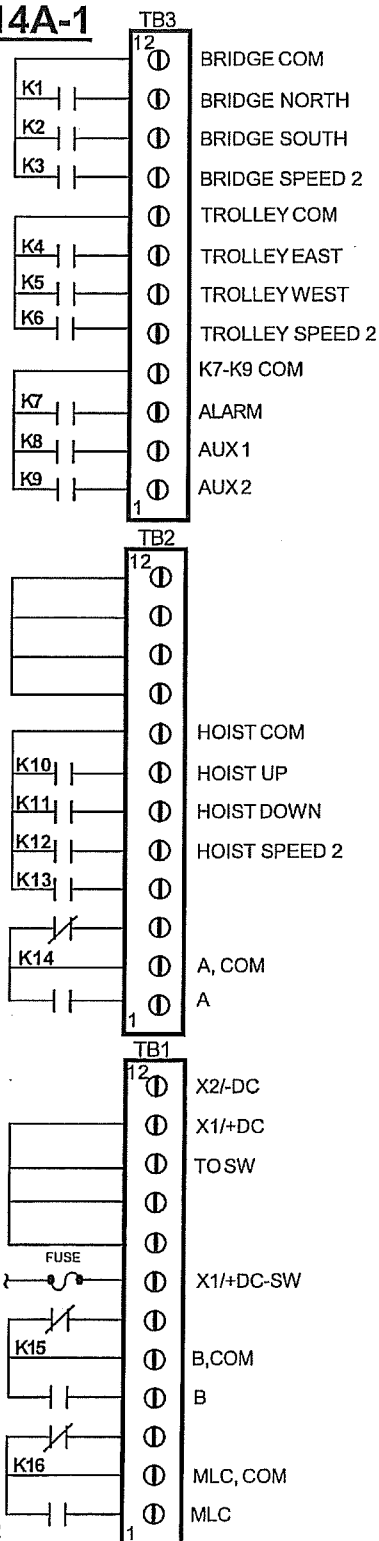

USE 12-28 AWG SOLID OR
STRANDED COPPER WIRE