


**CONFIGURATION SHEET 2014A-1**  
**21T20 / 21R14A**

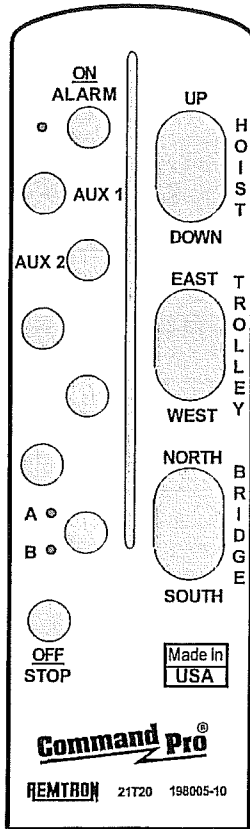

NOTES: ENG. # 198005  
TX: 010013 MAP RX: R14A0003  
2014A -1 STANDARD SYSTEM  
TWO AUX OUTPUT-MOMENTARY  
A/B/BOTH FOR T/H SELECTION

NOTE:  
 24VAC, 12VDC, 24VDC USE .750A FUSE  
 115VAC, 230VAC USE .250A FUSE

198005-1  
 For Service or Repairs contact  
**Laird Technologies**  
 1916 W. Mission Rd.  
 Escondido, CA 92029  
 Tel (800) 328-5570

USE 12-28 AWG SOLID OR  
 STRANDED COPPER WIRE

